




THERMOMETERS — RS SERIES

(Exhaust direct mounting)

Filled with a shock absorbing silicone oil of high viscosity, it eliminates the thread of wear on the delicate internal moving parts caused by vibrations of diesel engines. At the same time lubrication of the moving parts is taken care of by the liquid, thus obviating corrosion and ensures long life. Listings below are some technical information and the draft.

— Vertical / Bottom connection

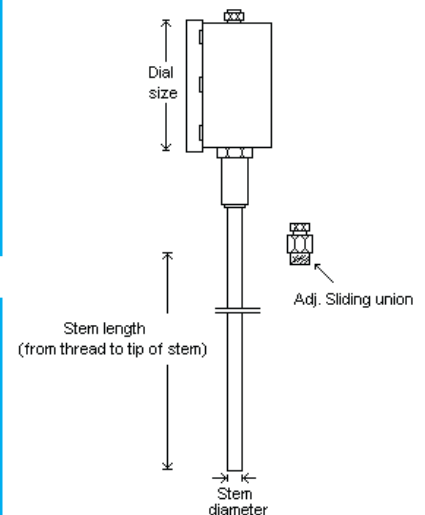

Specifications

- Material: Stainless steel case and stem
- Dial size: 100mm
- Measuring range: +50+650 Deg. C&F
- Accuracy: +/- 1.50~2 %
- System: Nitrogen filled system
- Thread connection: adjustable stainless steel male or female union
- Thread size: 1/2", 3/4" BSPM / BSPF
- Standard stem length: 200mm, 250mm, 300mm, 400mm
- Standard stem diameter: 10mm, 12mm