




Pressure Gauges (PF / PGR SERIES - Refrigerant & Freon gauges)

Applications:

The PF / PGR series pressure gauges are for non-corrosive refrigerants (R22/R134a/R404A) purposes. Dial are specially designed for non-corrosive refrigerant (R22/R134a/R404A) purposes. The PF series are mainly for general refrigerant measurement purposes while PGR series are glycerine filled for pressure or vacuum applications where high-frequency pressure fluctuations, surges or vibrations are present, constructed with corrosion resistant stainless steel case, bronze (or phosphor bronze) bourdon tube, bronze movement and mounting parts.

Specifications:

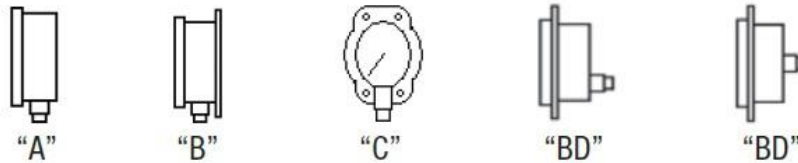

Size (mm)	Type	Connection Part (BSPM)	Standard Pressure Range
60	A, B, C, AD	1/4" Flare	76cmHg Vac.To 30 Bar & Deg. C
75	A, B, C, AD	1/4" Flare	76cmHg Vac.To 30 Bar & Deg. C
100	A, B, C, AD	1/4" Flare	76cmHg Vac.To 30 Bar & Deg. C



** Non-standard specifications from above can be customize on indent basis.

***All information subject to changes without prior notice owing to continuous development.