



Thermometers


RS SERIES (Exhaust direct mounting)

Applications:

Filled with a shock absorbing silicone oil of high viscosity, it eliminates the threat of wear on the delicate internal moving parts caused by vibrations of diesel engines. At the same time lubrication of the moving parts is taken care of by the liquid, thus obviating corrosion and ensures long life. Listings below are some technical information and the draft.

Specifications: (Horizontal / Rear connection)

- Material: Stainless steel case and stem
- Dial size: 100mm
- Measuring range: +50+650 Deg. C&F
- Accuracy: +/- 1.50~2 %
- System: Nitrogen filled system
- Thread connection: adjustable stainless steel male or female union
- Thread size: 1/2", 3/4" BSPM / BSPF
- Standard stem length: 200mm, 250mm, 300mm, 400mm
- Standard stem diameter: 10mm, 12mm

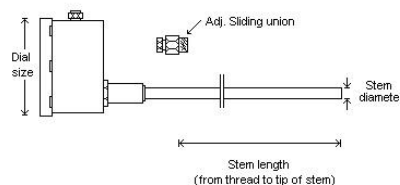

** Non-standard specifications from above can be customize on indent basis.

***All information subject to changes without prior notice owing to continuous development.